

**Automatic air blade hand dryer stainless steel cover**


- High range of hand dryer with laser sensor. It works with air currents at high speed an blade outlets.
- AISI 304 stainless steel cover.
- Intelligent heating element, it is activated if room temperature falls down 25°C. Comfortable use.
- High performance and efficiency. Consumes up to 85% less than others hand dryers.
- With 0,8 l water tank and HEPA filter included.
- Suitable for collectivities and places of very high frequency of use.
- Robust, anti-vandalism and safe because it's built without sharp edges or other dangerous elements.
- In accordance with European safety directives (EC).

**TECHNICAL DATA**

- Exterior shell made in AISI 304 stainless steel and water tank of high impact ABS.
- Air temperature (environment 20°C): 38°C to 10 cm.
- Motor of universal type.
- Motor speed of 21000 r.p.m.
- Air speed: 342 km/h.
- Effective flow: 4377 l/min.
- Total power of 1650 W.
- Motor power (1): 800 W.
- Heating element power: 850W
- Voltage/Frequency: 220-240 V – 50/60 Hz.
- Electric isolated: Class I.
- Automatic stop due to vandalism after 30s operation.
- Maximum consume of 7,2 A.
- Audible pressure at 2 meters: 72 dBA.
- Index protection: IPX4.
- Dimensions: 730 height x 300 width x 222 depth (mm).
- Weight: 12,5 kg.
- With safety thermal limiter and automatic stoppage due to vandalism.
- Function: place your hands in the inner channel of the device and move it up and down,
- Cleaning: is recommended with a cotton cloth slightly moistened in a soapy solution. Then, dry it.
- Estimated drying time with heating element: 11-12 seconds.

**SUGGESTED TEXT FOR PRESCRIPTION**

NOFER hand dryer, by injected air activated by sensor, total power 1650W, motor 800 W and heating element 850W. AISI304 stainless steel cover with parts in high impact ABS gray color. Dimensions: 730 height x 300 width x 222 depth (mm)



NOFER S.L.  
 Ctra. Laureà Miró, 385-387  
 08980 Sant Feliu de Llobregat BARCELONA (SPAIN)  
 Tel +34 934 742 423 · Fax +34 934 743 548  
 nofer@nofer.com · www.nofer.com

**Related Products**

**01101.B**

**01151.W**


**01250.B**

**01600.S**

**01851.W**

**01451.S**

TECHNICAL DRAWING

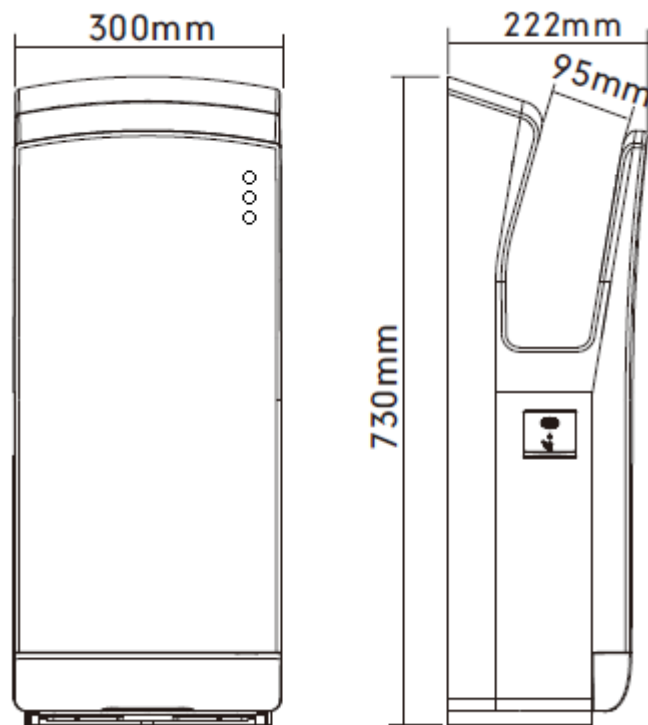

DIMENSIONS IN mm